



Mass Loaded Vinyl SealR Tape


MetroFlex Mass Loaded Vinyl SealR Tape is used to seal the joints and seams of mass loaded vinyl in various soundproofing applications to ensure a complete and air-tight sound barrier system.

MetroFlex SealR Tape should be applied on all seams between two sections of mass loaded vinyl after MetroFlex Sound SealR Acoustic Sound Sealant is applied to the joint.

MetroFlex SealR Tape is a composite of copolymer film laminated to an interwoven alloy which provides an extremely high tensile strength while maintaining the flexibility of the mass loaded vinyl. The adhesive is a self-curing acrylic which provides a high initial tack when applied to vinyl based products. The adhesive strength increases with time creating an exceptional permanent both with the vinyl.

Typical Physical Properties for MetroFlex SealR Tape:

Adhesive Thickness	1.3 mils
Substrate Thickness	7.0 mils
Peel Adhesion	160 oz/4 inch width
Shear Adhesion	2.2 psi
Max Continuous Use Temperature	200°F
Min Application Temperature	-40°F
Temperature Range	-40°F to 200°F

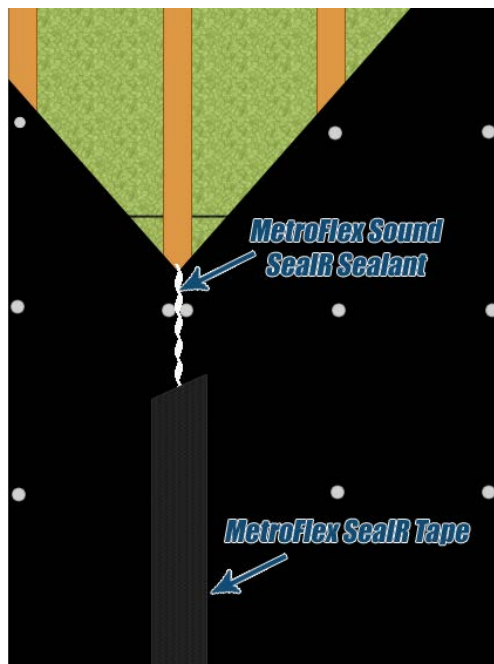

Standard roll size:

MF-TAPE 4" wide x 55yds



METRO SUPPLY COMPANY

12 Andrews Drive
Woodland Park, NJ 07424

Telephone: 973-237-1551

Fax: 973-237-1552

Internet: www.metrosupplycompany.com

Email: info@metro-supply-co.com

- The Mass of a Partition is the Major Factor in it's Ability to Block Sound -